



STREET  
TUBULAR BRACKET TYPE, PLANTED IN SOIL

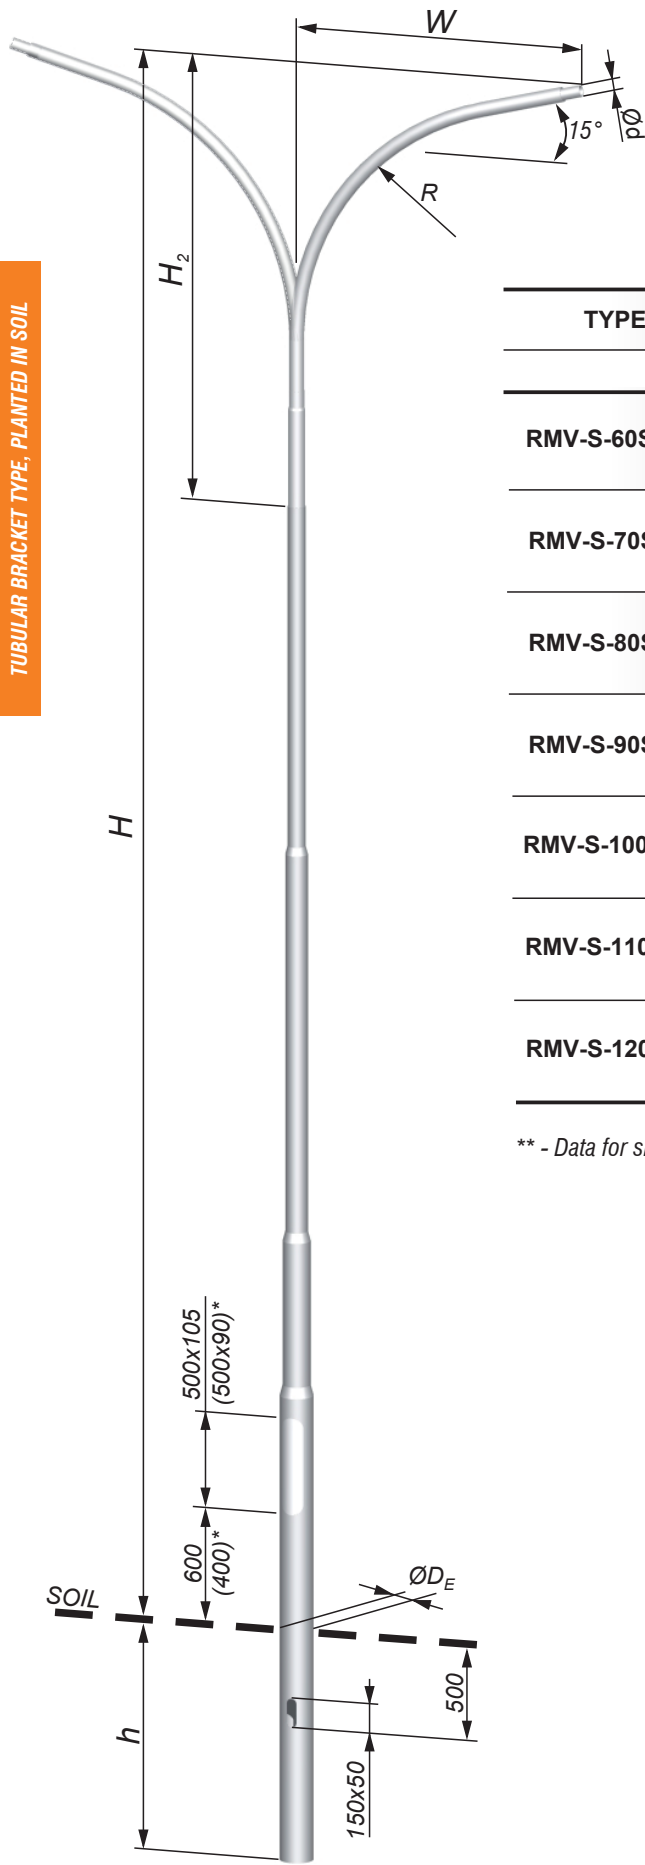

TYPE	W	t <sub>bl</sub>	H	H <sub>2</sub>	R <sub>(max)</sub>	Ød/D <sub>E</sub>	m**	h
	m	mm	m	m	m	mm	kg	m
RMV-S-60SRwG/4	1,0	6	2,0	0,6	48;	60/140	70,2	1,2
	1,5						72,5	
	2,0						74,2	
RMV-S-70SRwG/4	1,0	7	2,0	0,6	48;	60/140	76,7	1,2
	1,5						79,0	
	2,0						80,7	
RMV-S-80SRwG/4	1,0	8	2,2	0,6	48;	60/170	108,3	1,5
	1,5						110,5	
	2,0						112,2	
RMV-S-90SRwG/4	1,0	4	9	2,5	0,6	48;	132,4	1,5
	1,5						134,7	
	2,0						136,4	
RMV-S-100SRwG/4	1,0	10	3,5	0,6	48;	60/170	138,9	1,7
	1,5						141,1	
	2,0						142,8	
RMV-S-110SRwG/4	1,0	11	2,2	0,6	48;	60/170	145,4	1,7
	1,5						147,7	
	2,0						149,4	
RMV-S-120SRwG/4	1,0	12	3,2	0,6	48;	60/170	154	1,7
	1,5						156,2	
	2,0						157,9	

\*\* - Data for single arm brackets

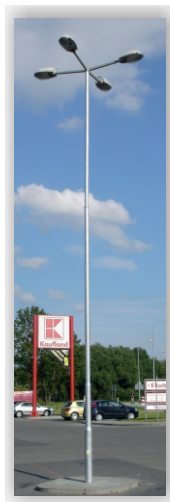

\* - Sizes listed for H ≤ 7m posts.



product certification



Our compliance with the European Community directives and harmonised standards has been certified and proven by the right to use the CE mark.